

2507

25x25x7MM

General Specifications

- ◆ **Material**..... Frame: Plastic (UL94V-0)
Impeller: Plastic (UL94V-0)
Lead Wire: UL1571AWG#28 or Equivalent (+) Red, (-) Black
- ◆ **Expected Life**..... Sleeve Bearing 30,000hrs (40°C)
- ◆ **Temperature Range**.... Operating Temperature -10°C~70°C (Non-condensing)
Storage Temperature -40°C~70°C (Non-condensing)
- ◆ **Safety Standards**..... UL, TUV, RoHS, CE
- ◆ **DC Fan Specials**..... RD, FG, IP54




Specifications

Model	Rev	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	A	B	VDC	VDC	Amp	Watt	RPM	CFM	m³/min	Inch-H ₂ O	Pa	dB-A	g
DA02507#05U	F01	S	5	3.5~5.5	0.20	1.00	12000	1.85	0.05	0.15	36.96	30.3	5.0
DA02507#05H	F01	S	5	3.5~5.5	0.15	0.75	10000	1.50	0.04	0.10	26.09	26.1	5.0
DA02507#05M	F01	S	5	3.5~5.5	0.12	0.60	8000	1.18	0.03	0.07	18.63	21.1	5.0
DA02507#05L	F01	S	5	3.5~5.5	0.07	0.35	6000	0.89	0.03	0.04	10.42	17.6	5.0
DA02507#12H	F01	S	12	7.0~13.8	0.07	0.84	12000	1.85	0.05	0.15	36.96	30.3	5.0
DA02507#12M	F01	S	12	7.0~13.8	0.05	0.60	10000	1.50	0.04	0.10	26.09	26.1	5.0
DA02507#12L	F01	S	12	7.0~13.8	0.04	0.48	8000	1.18	0.03	0.07	18.63	21.1	5.0

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

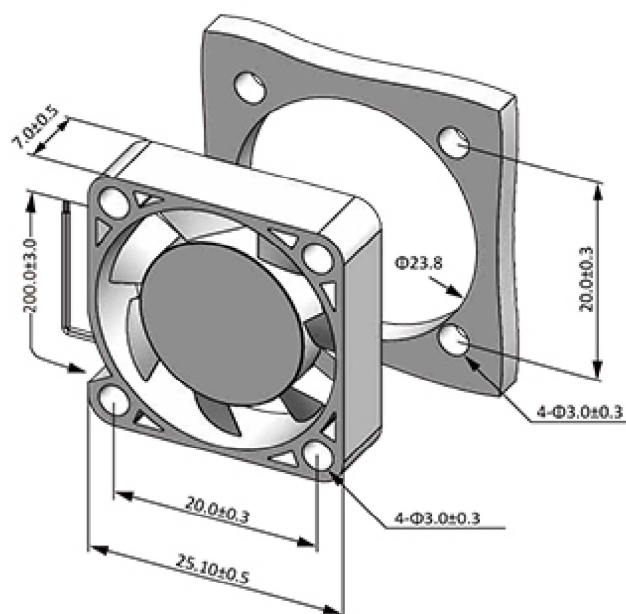

PQ Curve (At Rated Voltage)

