

3007

30x30x7MM

General Specifications

- ◆ **Material**..... Frame: Plastic (UL94V-0)
Impeller: Plastic (UL94V-0)
Lead Wire: UL1571AWG#28 or Equivalent (+) Red, (-) Black
- ◆ **Expected Life**..... Sleeve Bearing 30,000hrs (40°C)
- ◆ **Temperature Range**.... Operating Temperature -10°C~70°C (Non-condensing)
Storage Temperature -40°C~70°C (Non-condensing)
- ◆ **Safety Standards**..... UL, TUV, RoHS, CE
- ◆ **DC Fan Specials**..... RD, FG, IP54




Specifications

Model	Rev	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	A	B	VDC	VDC	Amp	Watt	RPM	CFM	m³/min	Inch-H ₂ O	Pa	dB-A	g
DA03007#05U	F01	S	5	3.5~5.5	0.28	1.40	12000	3.92	0.11	0.20	48.82	34.5	6.0
DA03007#05H	F01	S	5	3.5~5.5	0.18	0.90	10000	3.29	0.09	0.15	36.33	30.6	6.0
DA03007#05M	F01	S	5	3.5~5.5	0.14	0.70	8000	2.53	0.07	0.10	24.44	25.8	6.0
DA03007#05L	F01	S	5	3.5~5.5	0.10	0.50	6000	1.88	0.05	0.06	15.67	21.1	6.0
DA03007#12U	F01	S	12	7.0~13.8	0.12	1.44	12000	3.92	0.11	0.20	48.82	34.5	6.0
DA03007#12H	F01	S	12	7.0~13.8	0.09	1.08	10000	3.29	0.09	0.15	36.33	30.6	6.0
DA03007#12M	F01	S	12	7.0~13.8	0.07	0.84	8000	2.53	0.07	0.10	24.44	25.8	6.0
DA03007#12L	F01	S	12	7.0~13.8	0.05	0.60	6000	1.88	0.05	0.06	15.67	21.1	6.0

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

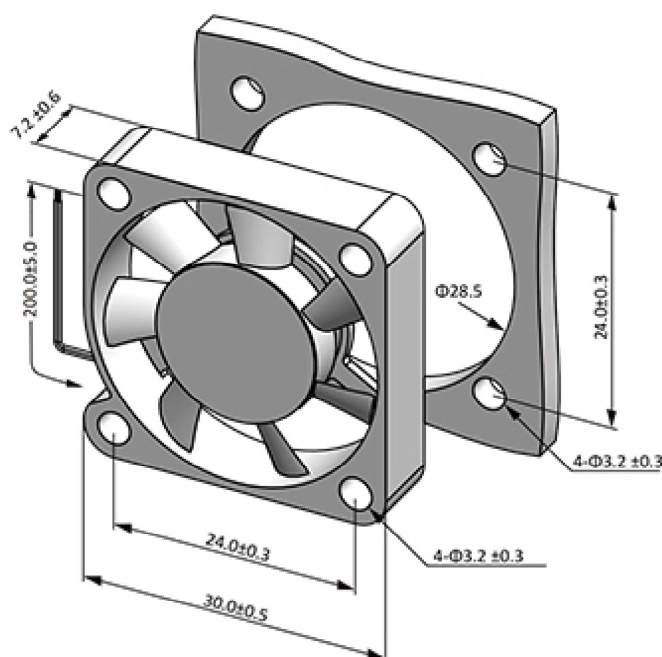

PQ Curve (At Rated Voltage)

