

4015

40x40x15MM

General Specifications

- ◆ **Material**..... Frame: Plastic (UL94V-0)
Impeller: Plastic (UL94V-0)
Lead Wire: UL1007AWG#26 or Equivalent (+) Red, (-) Black
- ◆ **Expected Life**..... Ball Bearing 70,000hrs (40°C)
Sleeve Bearing 30,000hrs (40°C)
- ◆ **Temperature Range**.... Operating Temperature -10°C~70°C (Non-condensing)
Storage Temperature -40°C~70°C (Non-condensing)
- ◆ **Safety Standards**..... UL, TUV, RoHS, CE
- ◆ **DC Fan Specials**..... RD, FG, IP56




Specifications

Model	Rev	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	A	B.S	VDC	VDC	Amp	Watt	RPM	CFM	m³/min	Inch-H ₂ O	Pa	dB-A	g
DA04015#12U	F01	B.S	12	7.0~13.8	0.30	3.60	12000	14.77	0.42	0.66	165.40	45.2	25.0
DA04015#12H	F01	B.S	12	7.0~13.8	0.26	3.12	10000	12.26	0.35	0.47	117.18	40.0	25.0
DA04015#12M	F01	B.S	12	7.0~13.8	0.16	1.92	8000	9.60	0.27	0.31	76.08	33.8	25.0
DA04015#12L	F01	B.S	12	7.0~13.8	0.10	1.44	6000	6.99	0.20	0.17	42.04	26.8	25.0
DA04015#24U	F01	B.S	24	14.0~27.6	0.15	3.60	12000	14.77	0.42	0.66	165.40	45.2	25.0
DA04015#24H	F01	B.S	24	14.0~27.6	0.13	3.12	10000	12.26	0.35	0.47	117.18	40.0	25.0
DA04015#24M	F01	B.S	24	14.0~27.6	0.08	1.92	8000	9.60	0.27	0.31	76.08	33.8	25.0
DA04015#24L	F01	B.S	24	14.0~27.6	0.06	1.44	6000	6.99	0.20	0.17	42.04	26.8	25.0

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

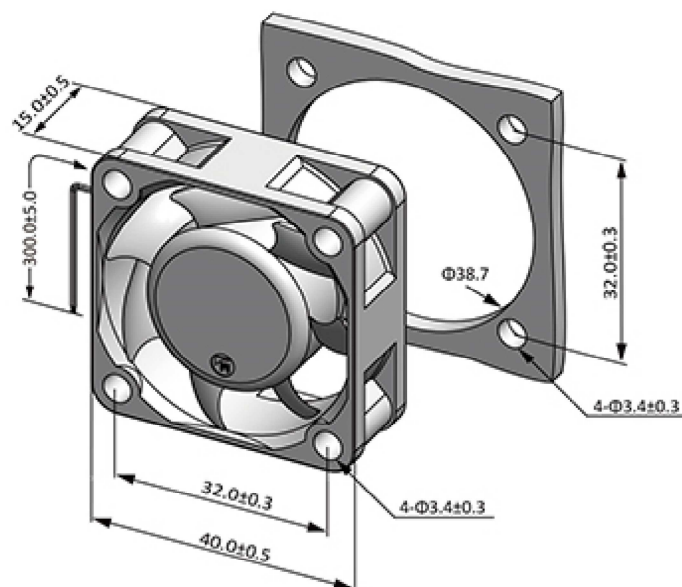

PQ Curve (At Rated Voltage)

