

4010

40x40x10MM

General Specifications

- ◆ Material..... Frame: Plastic (UL94V-0)
Impeller: Plastic (UL94V-0)
Lead Wire: UL1007AWG#26 or Equivalent (+) Red, (-) Black
- ◆ Expected Life..... Ball Bearing 70,000hrs (40°C)
Sleeve Bearing 30,000hrs (40°C)
- ◆ Temperature Range.... Operating Temperature -10°C~70°C (Non-condensing)
Storage Temperature -40°C~70°C (Non-condensing)
- ◆ Safety Standards..... UL, TUV, RoHS, CE
- ◆ DC Fan Specials..... RD, FG, IP56




Specifications


Model	Rev	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	A	B	VDC	VDC	Amp	Watt	RPM	CFM	m³/min	Inch-H ₂ O	Pa	dB-A	g
DA04010#05U	F01	B.S	5	3.5~5.5	0.22	1.10	7000	6.96	0.20	0.16	40.37	34.0	16.0
DA04010#05H	F01	B.S	5	3.5~5.5	0.18	0.90	6500	6.45	0.18	0.14	35.62	32.6	16.0
DA04010#05M	F01	B.S	5	3.5~5.5	0.14	0.70	6000	5.91	0.17	0.13	31.35	30.6	16.0
DA04010#05L	F01	B.S	5	3.5~5.5	0.10	0.50	5000	4.84	0.14	0.09	21.50	26.7	16.0
DA04010#05D	F01	B.S	5	3.5~5.5	0.08	0.40	4000	4.10	0.12	0.06	14.06	22.4	16.0
DA04010#12U	F01	B.S	12	7.0~13.8	0.15	1.80	7000	6.96	0.20	0.16	40.37	34.0	16.0
DA04010#12H	F01	B.S	12	7.0~13.8	0.10	1.20	6500	6.45	0.18	0.14	35.62	32.6	16.0
DA04010#12M	F01	B.S	12	7.0~13.8	0.08	0.96	6000	5.91	0.17	0.13	31.35	30.6	16.0
DA04010#12L	F01	B.S	12	7.0~13.8	0.06	0.72	5000	4.84	0.14	0.09	21.50	26.7	16.0
DA04010#12D	F01	B.S	12	7.0~13.8	0.04	0.48	4000	4.10	0.12	0.06	14.06	22.4	16.0
DA04010#24H	F01	B.S	24	14.0~27.6	0.07	1.68	7000	6.96	0.20	0.16	40.37	34.0	16.0
DA04010#24M	F01	B.S	24	14.0~27.6	0.06	1.44	6500	6.45	0.18	0.14	35.62	32.6	16.0
DA04010#24L	F01	B.S	24	14.0~27.6	0.05	1.20	6000	5.91	0.17	0.13	31.35	30.6	16.0
DA04010#24L	F01	B.S	24	14.0~27.6	0.04	0.96	5000	4.84	0.14	0.09	21.50	26.7	16.0

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

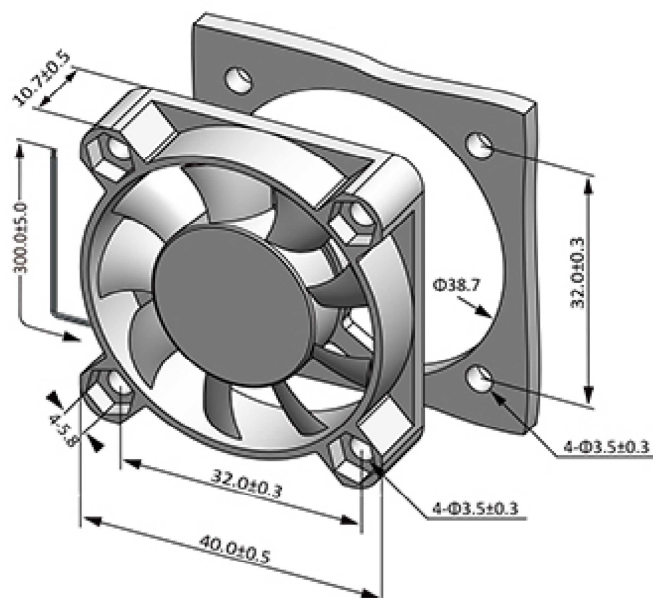

PQ Curve (At Rated Voltage)

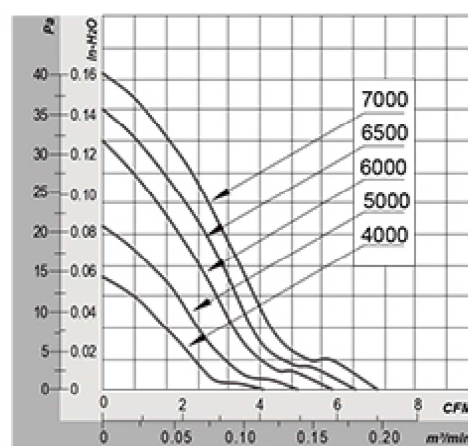

4010 40x40x10MM

General Specifications

- Material..... Frame: Plastic (UL94V-0)
Impeller: Plastic (UL94V-0)
Lead Wire: UL1007AWG#26 or Equivalent (+) Red, (-) Black
- Expected Life..... Ball Bearing 70,000hrs (40°C)
Sleeve Bearing 30,000hrs (40°C)
- Temperature Range.... Operating Temperature -10°C~70°C (Non-condensing)
Storage Temperature -40°C~70°C (Non-condensing)
- Safety Standards..... UL, TUV, RoHS, CE
- DC Fan Specials..... RD, FG, IP56




Specifications


Model	Rev	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	A	B	VDC	VDC	Amp	Watt	RPM	CFM	m³/min	Inch-H ₂ O	Pa	dB-A	g
DA04010#05U	F02	B.S	5	3.5~5.5	0.22	1.10	7000	7.41	0.21	0.18	43.91	34.8	16.0
DA04010#05H	F02	B.S	5	3.5~5.5	0.18	0.90	6500	6.84	0.19	0.16	38.64	32.7	16.0
DA04010#05M	F02	B.S	5	3.5~5.5	0.14	0.70	6000	6.20	0.18	0.13	31.84	30.5	16.0
DA04010#05L	F02	B.S	5	3.5~5.5	0.10	0.50	5000	5.07	0.14	0.09	22.65	25.7	16.0
DA04010#05D	F02	B.S	5	3.5~5.5	0.08	0.40	4000	4.02	0.11	0.06	14.68	22.3	16.0
DA04010#12U	F02	B.S	12	7.0~13.8	0.15	1.80	7000	7.41	0.21	0.18	43.91	34.8	16.0
DA04010#12H	F02	B.S	12	7.0~13.8	0.10	1.20	6500	6.84	0.19	0.16	38.64	32.7	16.0
DA04010#12M	F02	B.S	12	7.0~13.8	0.08	0.96	6000	6.20	0.18	0.13	31.84	30.5	16.0
DA04010#12L	F02	B.S	12	7.0~13.8	0.06	0.72	5000	5.07	0.14	0.09	22.65	25.7	16.0
DA04010#12D	F02	B.S	12	7.0~13.8	0.04	0.48	4000	4.02	0.11	0.06	14.68	22.3	16.0
DA04010#24U	F02	B.S	24	14.0~27.6	0.07	1.68	7000	7.41	0.21	0.18	43.91	34.8	16.0
DA04010#24H	F02	B.S	24	14.0~27.6	0.06	1.44	6500	6.84	0.19	0.16	38.64	32.7	16.0
DA04010#24M	F02	B.S	24	14.0~27.6	0.05	1.20	6000	6.20	0.18	0.13	31.84	30.5	16.0
DA04010#24L	F02	B.S	24	14.0~27.6	0.04	0.96	5000	5.07	0.14	0.09	22.65	25.7	16.0

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

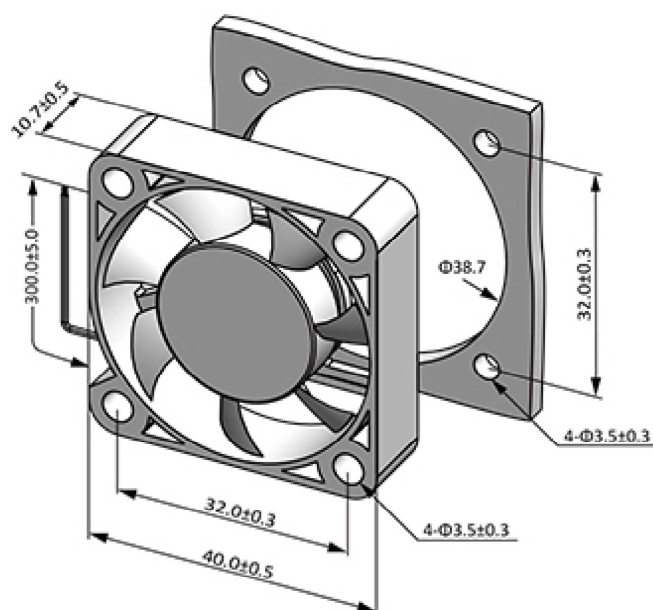

PQ Curve (At Rated Voltage)

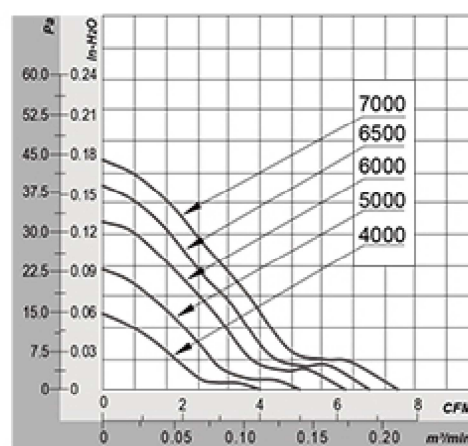

4010 40x40x10MM

General Specifications

- Material..... Frame: Plastic (UL94V-0)
Impeller: Plastic (UL94V-0)
Lead Wire: UL1007AWG#26 or Equivalent (+) Red, (-) Black
- Expected Life..... Ball Bearing 70,000hrs (40°C)
Sleeve Bearing 30,000hrs (40°C)
- Temperature Range.... Operating Temperature -10°C~70°C (Non-condensing)
Storage Temperature -40°C~70°C (Non-condensing)
- Safety Standards..... UL, TUV, RoHS, CE
- DC Fan Specials..... RD, FG, IP56




Specifications

Model	Rev	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	A	B	VDC	VDC	Amp	Watt	RPM	CFM	m³/min	Inch-H ₂ O	Pa	dB-A	g
DA04010#05U	F03	B.S	5	3.5~5.5	0.22	1.10	7000	9.23	0.26	0.18	43.93	31.0	16.0
DA04010#05H	F03	B.S	5	3.5~5.5	0.18	0.90	6500	8.54	0.24	0.15	38.28	28.4	16.0
DA04010#05M	F03	B.S	5	3.5~5.5	0.14	0.70	6000	7.74	0.22	0.13	33.14	27.0	16.0
DA04010#05L	F03	B.S	5	3.5~5.5	0.10	0.50	5000	6.30	0.18	0.09	23.60	23.8	16.0
DA04010#05D	F03	B.S	5	3.5~5.5	0.08	0.40	4000	4.94	0.14	0.06	14.94	21.3	16.0
DA04010#12U	F03	B.S	12	7.0~13.8	0.15	1.80	7000	9.23	0.26	0.18	43.93	31.0	16.0
DA04010#12H	F03	B.S	12	7.0~13.8	0.10	1.20	6500	8.54	0.24	0.15	38.28	28.4	16.0
DA04010#12M	F03	B.S	12	7.0~13.8	0.08	0.96	6000	7.74	0.22	0.13	33.14	27.0	16.0
DA04010#12L	F03	B.S	12	7.0~13.8	0.06	0.72	5000	6.30	0.18	0.09	23.60	23.8	16.0
DA04010#12D	F03	B.S	12	7.0~13.8	0.04	0.48	4000	4.94	0.14	0.06	14.94	21.3	16.0
DA04010#24U	F03	B.S	24	14.0~27.6	0.07	1.68	7000	9.23	0.26	0.18	43.93	31.0	16.0
DA04010#24H	F03	B.S	24	14.0~27.6	0.06	1.44	6500	8.54	0.24	0.15	38.28	28.4	16.0
DA04010#24M	F03	B.S	24	14.0~27.6	0.05	1.20	6000	7.74	0.22	0.13	33.14	27.0	16.0
DA04010#24L	F03	B.S	24	14.0~27.6	0.04	0.96	5000	6.30	0.18	0.09	23.60	23.8	16.0

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

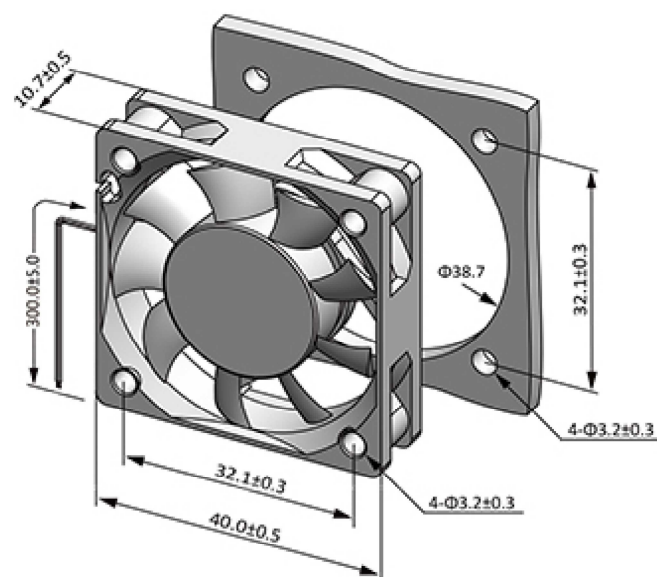

PQ Curve (At Rated Voltage)

