

8032

80x80x32MM

General Specifications

- ◆ Material..... Frame: Plastic (UL94V-0)
Impeller: Plastic (UL94V-0)
Lead Wire: UL1007AWG#24 or Equivalent (+) Red, (-) Black
- ◆ Expected Life..... Ball Bearing 70,000hrs (40°C)
- ◆ Temperature Range.... Operating Temperature -10°C~70°C (Non-condensing)
Storage Temperature -40°C~70°C (Non-condensing)
- ◆ Safety Standards..... UL, TUV, RoHS, CE
- ◆ DC Fan Specials..... RD, FG, PWM, IP56




Specifications

Model	Rev	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	A	B	VDC	VDC	Amp	Watt	RPM	CFM	m³/min	Inch-H ₂ O	Pa	dB-A	g
DA08032#12U	F01	B	12	7.0~13.8	1.50	18.00	6500	80.52	2.28	0.94	234.15	58.2	95.0
DA08032#12H	F01	B	12	7.0~13.8	0.90	10.80	5500	67.00	1.90	0.66	164.76	54.1	95.0
DA08032#12M	F01	B	12	7.0~13.8	0.60	7.20	4500	55.83	1.58	0.44	110.30	51.8	95.0
DA08032#12L	F01	B	12	7.0~13.8	0.40	4.80	3500	42.17	1.19	0.27	66.95	47.9	95.0
DA08032#24U	F01	B	24	14.0~27.6	0.80	19.20	6500	80.52	2.28	0.94	234.15	58.2	95.0
DA08032#24H	F01	B	24	14.0~27.6	0.50	12.00	5500	67.00	1.90	0.66	164.76	54.1	95.0
DA08032#24M	F01	B	24	14.0~27.6	0.30	7.20	4500	55.83	1.58	0.44	110.30	51.8	95.0
DA08032#24L	F01	B	24	14.0~27.6	0.20	4.80	3500	42.17	1.19	0.27	66.95	47.9	95.0
DA08032#48U	F01	B	48	28.0~56.0	0.50	24.00	6500	80.52	2.28	0.94	234.15	58.2	95.0
DA08032#48H	F01	B	48	28.0~56.0	0.30	14.40	5500	67.00	1.90	0.66	164.76	54.1	95.0
DA08032#48M	F01	B	48	28.0~56.0	0.20	9.60	4500	55.83	1.58	0.44	110.30	51.8	95.0
DA08032#48L	F01	B	48	28.0~56.0	0.10	4.80	3500	42.17	1.19	0.27	66.95	47.9	95.0

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

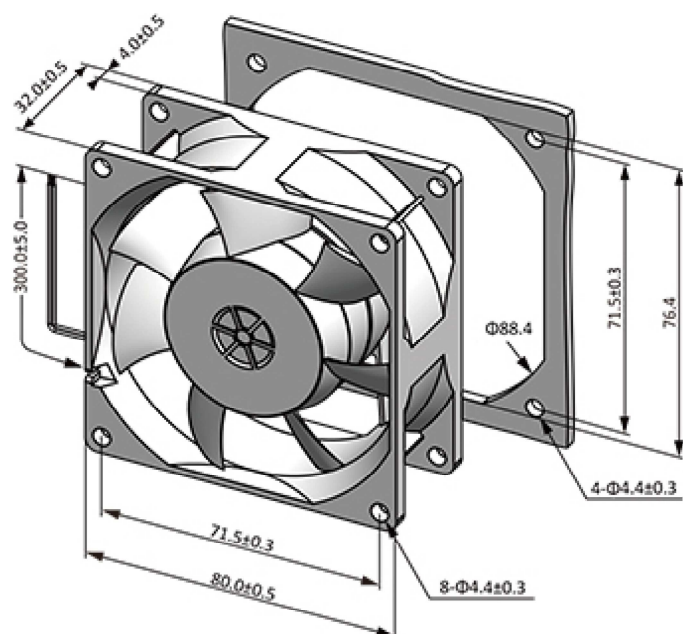

PQ Curve (At Rated Voltage)

