

9225

92x92x25MM

General Specifications

- Material..... Frame: Plastic (UL94V-0)
Impeller: Plastic (UL94V-0)
Lead Wire: UL1007AWG#24 or Equivalent (+) Red, (-) Black
- Expected Life..... Ball Bearing 70,000hrs (40°C)
- Temperature Range.... Operating Temperature -10°C~70°C (Non-condensing)
Storage Temperature -40°C~70°C (Non-condensing)
- Safety Standards..... UL, TUV, RoHS, CE
- DC Fan Specials..... RD, FG, PWM, IP56




Specifications


Model	Rev	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	A	B	VDC	VDC	Amp	Watt	RPM	CFM	m³/min	Inch-H ₂ O	Pa	dB-A	g
DA09225#12X	F01	B	12	7.0~13.8	0.65	7.80	5000	87.46	2.48	0.46	115.20	49.6	78.0
DA09225#24X	F01	B	24	14.0~27.6	0.33	7.92	5000	87.46	2.48	0.46	115.20	49.6	78.0
DA09225#48X	F01	B	48	28.0~56.0	0.16	7.68	5000	87.46	2.48	0.46	115.20	49.6	78.0

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

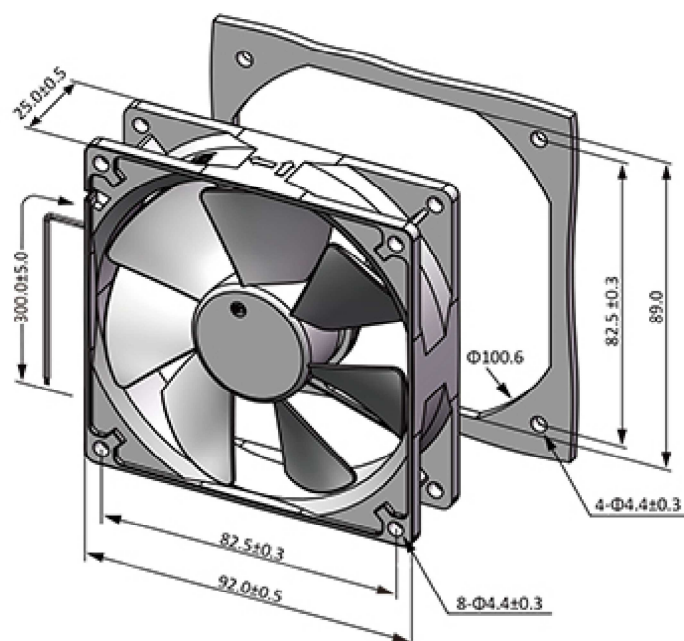

PQ Curve (At Rated Voltage)

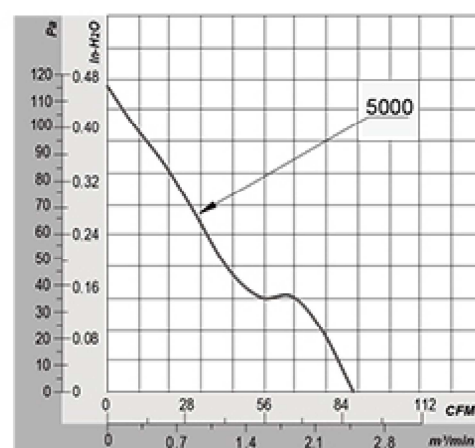

9225

92x92x25MM

General Specifications

- ◆ Material..... Frame: Plastic (UL94V-0)
Impeller: Plastic (UL94V-0)
Lead Wire: UL1007AWG#24 or Equivalent (+) Red, (-) Black
- ◆ Expected Life..... Ball Bearing 70,000hrs (40°C)
Sleeve Bearing 30,000hrs (40°C)
- ◆ Temperature Range.... Operating Temperature -10°C~70°C (Non-condensing)
Storage Temperature -40°C~70°C (Non-condensing)
- ◆ Safety Standards..... UL, TUV, RoHS, CE
- ◆ DC Fan Specials..... RD, FG, PWM, IP56




Specifications


Model	Rev	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	A	B	VDC	VDC	Amp	Watt	RPM	CFM	m³/min	Inch-H₂O	Pa	dB-A	g
DA09225#12U	F02	B.S	12	7.0~13.8	0.60	7.20	4000	70.37	1.99	0.37	92.04	46.8	78.0
DA09225#12H	F02	B.S	12	7.0~13.8	0.50	6.00	3500	61.61	1.75	0.28	70.55	43.6	78.0
DA09225#12M	F02	B.S	12	7.0~13.8	0.40	4.80	3000	52.30	1.48	0.21	52.58	40.4	78.0
DA09225#12L	F02	B.S	12	7.0~13.8	0.30	3.60	2500	43.73	1.24	0.15	37.42	34.2	78.0
DA09225#12D	F02	B.S	12	7.0~13.8	0.20	2.40	2000	34.98	0.99	0.10	23.95	28.5	78.0
DA09225#24U	F02	B.S	24	14.0~27.6	0.50	12.00	4000	70.37	1.99	0.37	92.04	46.8	78.0
DA09225#24H	F02	B.S	24	14.0~27.6	0.40	9.60	3500	61.61	1.75	0.28	70.55	43.6	78.0
DA09225#24M	F02	B.S	24	14.0~27.6	0.30	7.20	3000	52.30	1.48	0.21	52.58	40.4	78.0
DA09225#24L	F02	B.S	24	14.0~27.6	0.20	4.80	2500	43.73	1.24	0.15	37.42	34.2	78.0
DA09225#24D	F02	B.S	24	14.0~27.6	0.15	3.60	2000	34.98	0.99	0.10	23.95	28.5	78.0
DA09225#48U	F02	B.S	48	28.0~56.0	0.40	19.20	4000	70.37	1.99	0.37	92.04	46.8	78.0
DA09225#48H	F02	B.S	48	28.0~56.0	0.25	12.00	3500	61.61	1.75	0.28	70.55	43.6	78.0
DA09225#48M	F02	B.S	48	28.0~56.0	0.20	9.60	3000	52.30	1.48	0.21	52.58	40.4	78.0
DA09225#48L	F02	B.S	48	28.0~56.0	0.15	7.20	2500	43.73	1.24	0.15	37.42	34.2	78.0

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

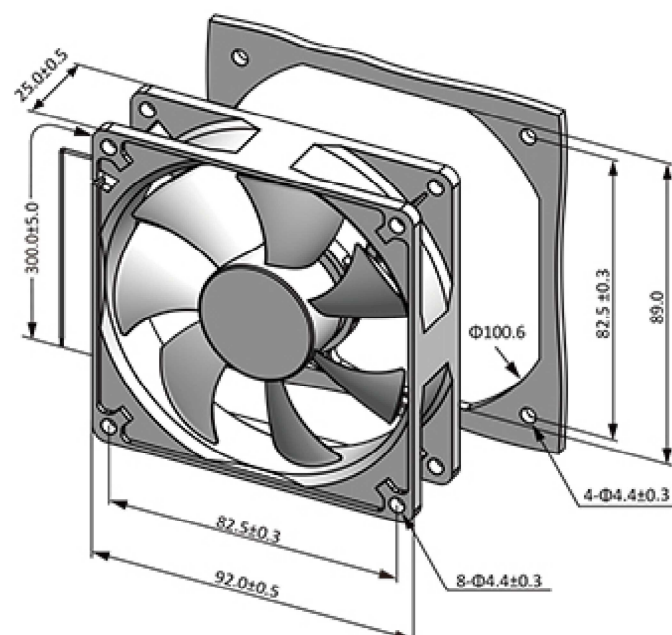

PQ Curve (At Rated Voltage)

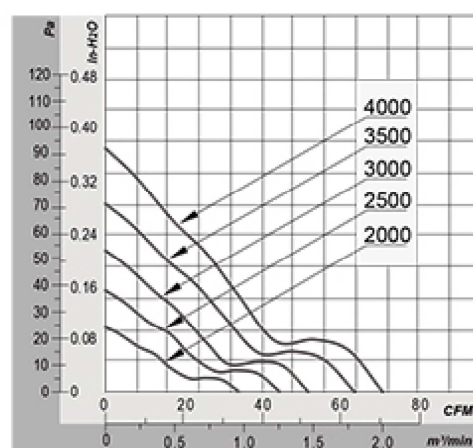

9225

92x92x25MM

General Specifications

- Material..... Frame: Plastic (UL94V-0)
Impeller: Plastic (UL94V-0)
Lead Wire: UL1007AWG#24 or Equivalent (+) Red, (-) Black
- Expected Life..... Ball Bearing 70,000hrs (40°C)
- Temperature Range.... Operating Temperature -10°C~70°C (Non-condensing)
Storage Temperature -40°C~70°C (Non-condensing)
- Safety Standards..... UL, TUV, RoHS, CE
- DC Fan Specials..... RD, FG, PWM, IP56




Specifications

Model	Rev	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	A	B	VDC	VDC	Amp	Watt	RPM	CFM	m³/min	Inch-H₂O	Pa	dB-A	g
DA09225#12V	F03	B	12	7.0~13.8	1.00	12.00	6000	105.95	3.00	0.72	180.52	54.9	78.0
DA09225#12X	F03	B	12	7.0~13.8	0.65	7.80	5000	86.18	2.44	0.47	116.56	49.6	78.0
DA09225#24V	F03	B	24	14.0~27.6	0.52	12.48	6000	105.95	3.00	0.72	180.52	54.9	78.0
DA09225#24X	F03	B	24	14.0~27.6	0.33	7.92	5000	86.18	2.44	0.47	116.56	49.6	78.0
DA09225#48V	F03	B	48	28.0~56.0	0.26	12.48	6000	105.95	3.00	0.72	180.52	54.9	78.0
DA09225#48X	F03	B	48	28.0~56.0	0.16	7.68	5000	86.18	2.44	0.47	116.56	49.6	78.0

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

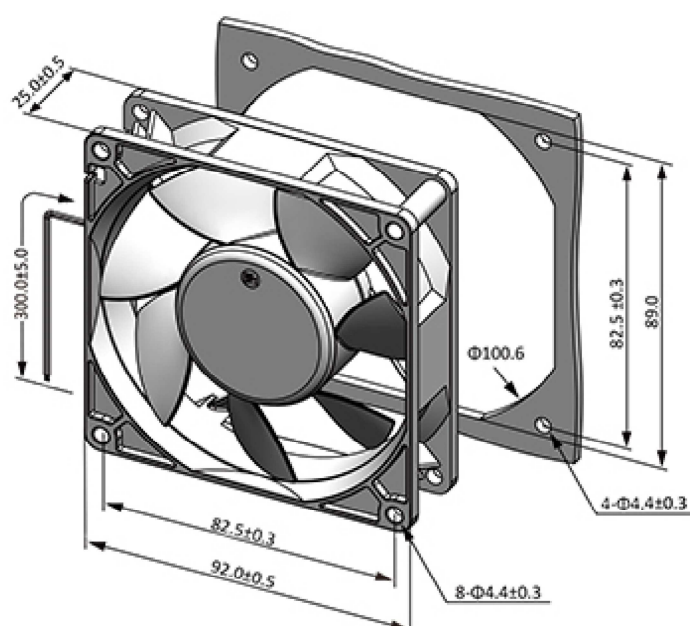

PQ Curve (At Rated Voltage)

