

6015

60x60x15MM

General Specifications

- ◆ Material..... Frame: Plastic (UL94V-0)
Impeller: Plastic (UL94V-0)
Lead Wire: UL1571AWG#24 or Equivalent (+) Red, (-) Black
- ◆ Expected Life..... Ball Bearing 70,000hrs (40°C)
Sleeve Bearing 30,000hrs (40°C)
- ◆ Temperature Range.... Operating Temperature -10°C~70°C (Non-condensing)
Storage Temperature -40°C~70°C (Non-condensing)
- ◆ Safety Standards..... UL, TUV, RoHS, CE
- ◆ DC Fan Specials..... RD, FG, PWM, IP56




Specifications

Model	Rev	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	A	B	VDC	VDC	Amp	Watt	RPM	CFM	m³/min	Inch-H₂O	Pa	dB-A	g
DA06015#05H	F01	B.S	5	3.5~5.5	0.58	2.90	4000	18.64	0.53	0.16	39.20	31.9	42.0
DA06015#05M	F01	B.S	5	3.5~5.5	0.40	2.00	3500	16.62	0.47	0.13	31.17	28.7	42.0
DA06015#05L	F01	B.S	5	3.5~5.5	0.25	1.25	3000	13.89	0.39	0.09	22.51	25.7	42.0
DA06015#12U	F01	B.S	12	7.0~13.8	0.30	3.60	5000	23.18	0.66	0.22	54.63	37.8	42.0
DA06015#12H	F01	B.S	12	7.0~13.8	0.22	2.64	4500	20.86	0.59	0.18	44.26	35.8	42.0
DA06015#12M	F01	B.S	12	7.0~13.8	0.18	2.16	4000	18.64	0.53	0.16	39.20	31.9	42.0
DA06015#12L	F01	B.S	12	7.0~13.8	0.15	1.80	3500	16.62	0.47	0.13	31.17	28.7	42.0
DA06015#12D	F01	B.S	12	7.0~13.8	0.12	1.44	3000	13.89	0.39	0.09	22.51	25.7	42.0
DA06015#24H	F01	B.S	24	14.0~27.6	0.16	3.84	4500	20.86	0.59	0.18	44.26	35.8	42.0
DA06015#24M	F01	B.S	24	14.0~27.6	0.12	2.88	4000	18.64	0.53	0.16	39.20	31.9	42.0
DA06015#24L	F01	B.S	24	14.0~27.6	0.10	2.40	3500	16.62	0.47	0.13	31.17	28.7	42.0

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

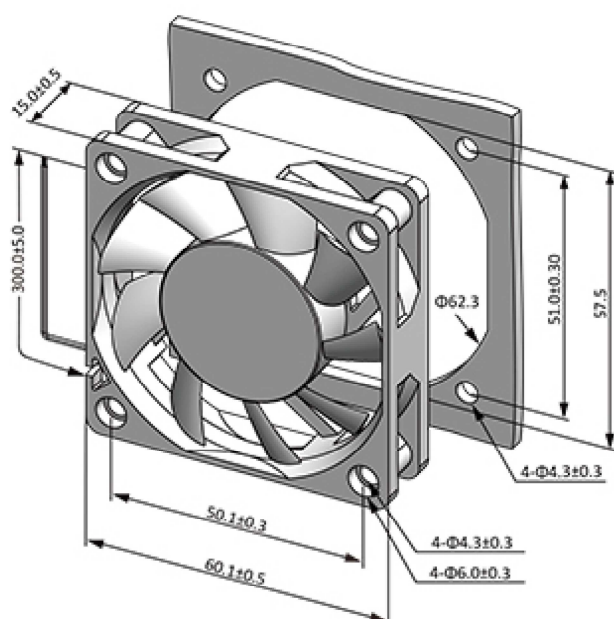

PQ Curve (At Rated Voltage)

