

6025

60x60x25MM

General Specifications

- ◆ Material..... Frame: Plastic (UL94V-0)
Impeller: Plastic (UL94V-0)
Lead Wire: UL1007AWG#24 or Equivalent (+) Red, (-) Black
- ◆ Expected Life..... Ball Bearing 70,000hrs (40°C)
Sleeve Bearing 30,000hrs (40°C)
- ◆ Temperature Range.... Operating Temperature -10°C~70°C (Non-condensing)
Storage Temperature -40°C~70°C (Non-condensing)
- ◆ Safety Standards..... UL, TUV, RoHS, CE
- ◆ DC Fan Specials..... RD, FG, PWM, IP56




Specifications


Model	Rev	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	A	B	VDC	VDC	Amp	Watt	RPM	CFM	m³/min	Inch-H ₂ O	Pa	dB-A	g
DA06025#12U	F01	B.S	12	7.0~13.8	0.45	5.40	6000	31.75	0.90	0.42	103.77	42.9	56.0
DA06025#12H	F01	B.S	12	7.0~13.8	0.25	3.00	5000	26.55	0.75	0.29	72.55	37.1	56.0
DA06025#12M	F01	B.S	12	7.0~13.8	0.18	2.16	4000	21.08	0.60	0.18	44.21	31.6	56.0
DA06025#12L	F01	B.S	12	7.0~13.8	0.10	1.20	3000	15.80	0.45	0.10	25.92	25.5	56.0
DA06025#12D	F01	B.S	12	7.0~13.8	0.06	0.72	2000	10.15	0.29	0.05	11.44	21.2	56.0
DA06025#24U	F01	B.S	24	14.0~27.6	0.25	6.00	6000	31.75	0.90	0.42	103.77	42.9	56.0
DA06025#24H	F01	B.S	24	14.0~27.6	0.18	4.32	5000	26.55	0.75	0.29	72.55	37.1	56.0
DA06025#24M	F01	B.S	24	14.0~27.6	0.15	3.60	4000	21.08	0.60	0.18	44.21	31.6	56.0
DA06025#24L	F01	B.S	24	14.0~27.6	0.10	2.40	3000	15.80	0.45	0.10	25.92	25.5	56.0
DA06025#48U	F01	B.S	48	28.0~56.0	0.18	8.64	6000	10.15	0.29	0.05	103.77	21.2	56.0
DA06025#48H	F01	B.S	48	28.0~56.0	0.12	5.76	5000	26.55	0.75	0.29	72.55	37.1	56.0
DA06025#48M	F01	B.S	48	28.0~56.0	0.08	3.84	4000	21.08	0.60	0.18	44.21	31.6	56.0
DA06025#48L	F01	B.S	48	28.0~56.0	0.06	2.88	3000	15.80	0.45	0.10	25.92	25.5	56.0

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

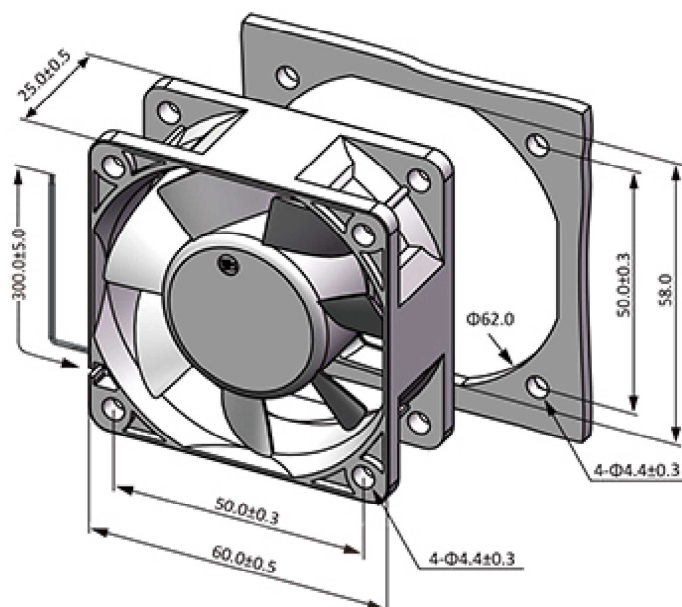

PQ Curve (At Rated Voltage)

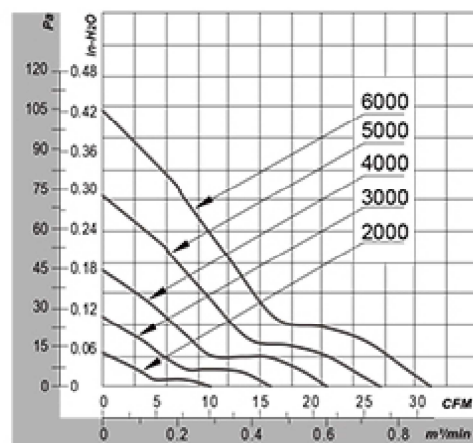

6025

60x60x25MM

General Specifications

- ◆ Material..... Frame: Plastic (UL94V-0)
Impeller: Plastic (UL94V-0)
Lead Wire: UL1007AWG#24 or Equivalent (+) Red, (-) Black
- ◆ Expected Life..... Ball Bearing 70,000hrs (40°C)
Sleeve Bearing 30,000hrs (40°C)
- ◆ Temperature Range.... Operating Temperature -10°C~70°C (Non-condensing)
Storage Temperature -40°C~70°C (Non-condensing)
- ◆ Safety Standards..... UL, TUV, RoHS, CE
- ◆ DC Fan Specials..... RD, FG, PWM, IP56




Specifications

Model	Rev	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	A	B	VDC	VDC	Amp	Watt	RPM	CFM	m³/min	Inch-H ₂ O	Pa	dB-A	g
DA06025#12U	F02	B.S	12	7.0~13.8	0.45	5.40	6000	29.22	0.83	0.41	102.50	43.2	56.0
DA06025#12H	F02	B.S	12	7.0~13.8	0.25	3.00	5000	25.54	0.72	0.29	72.79	38.0	56.0
DA06025#12M	F02	B.S	12	7.0~13.8	0.18	2.16	4000	19.63	0.56	0.18	45.41	34.8	56.0
DA06025#12L	F02	B.S	12	7.0~13.8	0.10	1.20	3000	14.80	0.42	0.11	26.61	31.7	56.0
DA06025#12D	F02	B.S	12	7.0~13.8	0.06	0.72	2000	9.58	0.27	0.05	12.28	29.4	56.0
DA06025#24U	F02	B.S	24	14.0~27.6	0.25	6.00	6000	29.22	0.83	0.41	102.50	43.2	56.0
DA06025#24H	F02	B.S	24	14.0~27.6	0.18	4.32	5000	25.54	0.72	0.29	72.79	38.0	56.0
DA06025#24M	F02	B.S	24	14.0~27.6	0.15	3.60	4000	19.63	0.56	0.18	45.41	34.8	56.0
DA06025#24L	F02	B.S	24	14.0~27.6	0.10	2.40	3000	14.80	0.42	0.11	26.61	31.7	56.0
DA06025#48U	F02	B.S	48	28.0~56.0	0.18	8.64	6000	29.22	0.83	0.41	102.50	43.2	56.0
DA06025#48H	F02	B.S	48	28.0~56.0	0.12	5.76	5000	25.54	0.72	0.29	72.79	38.0	56.0
DA06025#48M	F02	B.S	48	28.0~56.0	0.08	3.84	4000	19.63	0.56	0.18	45.41	34.8	56.0
DA06025#48L	F02	B.S	48	28.0~56.0	0.06	2.88	3000	14.80	0.42	0.11	26.61	31.7	56.0

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

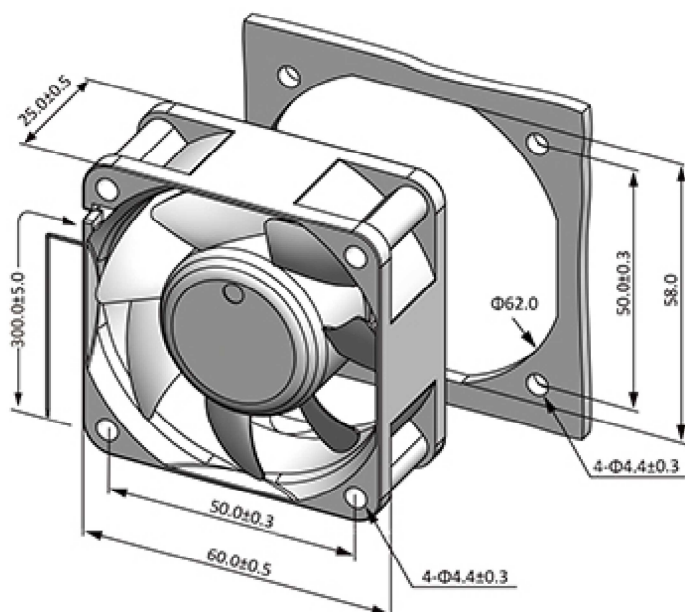

PQ Curve (At Rated Voltage)

