

6020

60x60x20MM

General Specifications

- ◆ Material..... Frame: Plastic (UL94V-0)
Impeller: Plastic (UL94V-0)
Lead Wire: UL1007AWG#24 or Equivalent (+) Red, (-) Black
- ◆ Expected Life..... Ball Bearing 70,000hrs (40°C)
Sleeve Bearing 30,000hrs (40°C)
- ◆ Temperature Range.... Operating Temperature -10°C~70°C (Non-condensing)
Storage Temperature -40°C~70°C (Non-condensing)
- ◆ Safety Standards..... UL, TUV, RoHS, CE
- ◆ DC Fan Specials..... RD, FG, PWM, IP56




Specifications


Model	Rev	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	A	B	VDC	VDC	Amp	Watt	RPM	CFM	m³/min	Inch-H₂O	Pa	dB-A	g
DA06020#12U	F01	B.S	12	7.0~13.8	0.25	3.00	5000	23.66	0.67	0.25	61.25	37.5	52.0
DA06020#12H	F01	B.S	12	7.0~13.8	0.20	2.40	4500	21.34	0.60	0.20	49.99	33.7	52.0
DA06020#12M	F01	B.S	12	7.0~13.8	0.16	1.92	4000	18.82	0.53	0.16	40.18	31.7	52.0
DA06020#12L	F01	B.S	12	7.0~13.8	0.12	1.44	3500	16.53	0.47	0.12	30.97	28.1	52.0
DA06020#12D	F01	B.S	12	7.0~13.8	0.10	1.20	3000	13.99	0.40	0.09	22.18	24.5	52.0
DA06020#24U	F01	B.S	24	14.0~27.6	0.16	3.84	5000	23.66	0.67	0.25	61.25	37.5	52.0
DA06020#24H	F01	B.S	24	14.0~27.6	0.14	3.36	4500	21.34	0.60	0.20	49.99	33.7	52.0
DA06020#24M	F01	B.S	24	14.0~27.6	0.12	2.88	4000	18.82	0.53	0.16	40.18	31.7	52.0
DA06020#24L	F01	B.S	24	14.0~27.6	0.10	2.40	3500	16.53	0.47	0.12	30.97	28.1	52.0

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

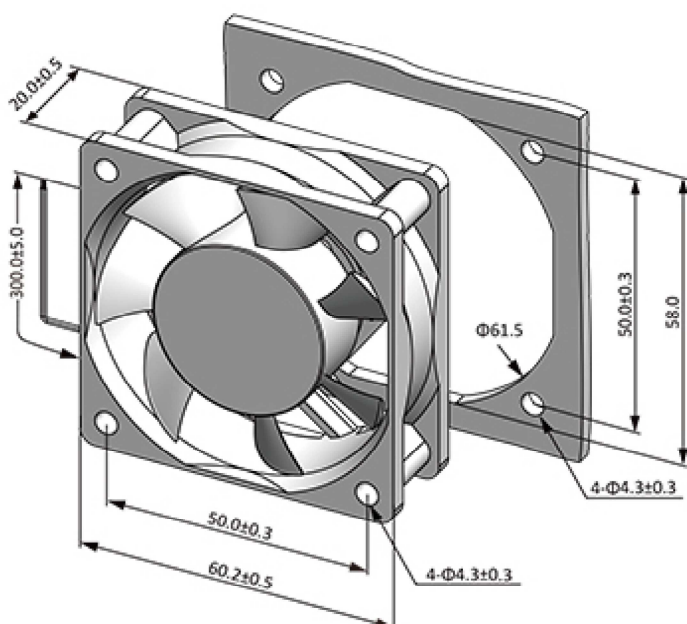

PQ Curve (At Rated Voltage)

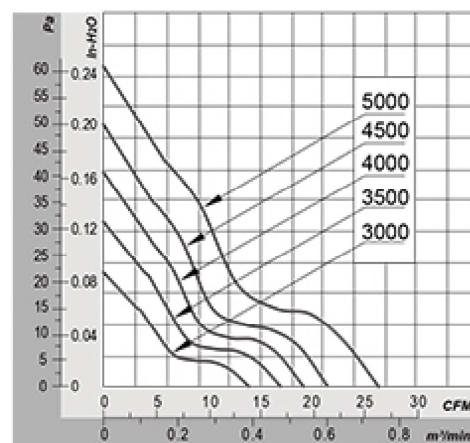

6020

60x60x20MM

General Specifications

- ◆ Material..... Frame: Plastic (UL94V-0)
Impeller: Plastic (UL94V-0)
Lead Wire: UL1007AWG#24 or Equivalent (+) Red, (-) Black
- ◆ Expected Life..... Ball Bearing 70,000hrs (40°C)
Sleeve Bearing 30,000hrs (40°C)
- ◆ Temperature Range.... Operating Temperature -10°C~70°C (Non-condensing)
Storage Temperature -40°C~70°C (Non-condensing)
- ◆ Safety Standards..... UL, TUV, RoHS, CE
- ◆ DC Fan Specials..... RD, FG, PWM, IP56




Specifications

Model	Rev	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	A	B	VDC	VDC	Amp	Watt	RPM	CFM	m³/min	Inch-H2O	Pa	dB-A	g
DA06020#12U	F02	B.S	12	7.0~13.8	0.25	3.00	5000	27.04	0.77	0.30	75.41	38.0	52.0
DA06020#12H	F02	B.S	12	7.0~13.8	0.20	2.40	4500	24.26	0.69	0.23	58.35	34.8	52.0
DA06020#12M	F02	B.S	12	7.0~13.8	0.16	1.92	4000	21.25	0.60	0.18	45.09	31.7	52.0
DA06020#12L	F02	B.S	12	7.0~13.8	0.12	1.44	3500	18.61	0.53	0.14	34.84	29.4	52.0
DA06020#12D	F02	B.S	12	7.0~13.8	0.10	1.20	3000	15.95	0.45	0.10	25.59	26.1	52.0
DA06020B24V	F02	B.S	24	14.0~27.6	0.33	7.92	7000	38.25	1.08	0.56	138.99	46.7	52.0
DA06020B24X	F02	B.S	24	14.0~27.6	0.17	4.08	6000	32.79	0.93	0.41	102.11	43.4	52.0
DA06020#24U	F02	B.S	24	14.0~27.6	0.16	3.84	5000	27.04	0.77	0.30	75.41	38.0	52.0
DA06020#24H	F02	B.S	24	14.0~27.6	0.14	3.36	4500	24.26	0.69	0.23	58.35	34.8	52.0
DA06020#24M	F02	B.S	24	14.0~27.6	0.12	2.88	4000	21.25	0.60	0.18	45.09	31.7	52.0
DA06020#24L	F02	B.S	24	14.0~27.6	0.10	2.40	3500	18.61	0.53	0.14	34.84	29.4	52.0

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

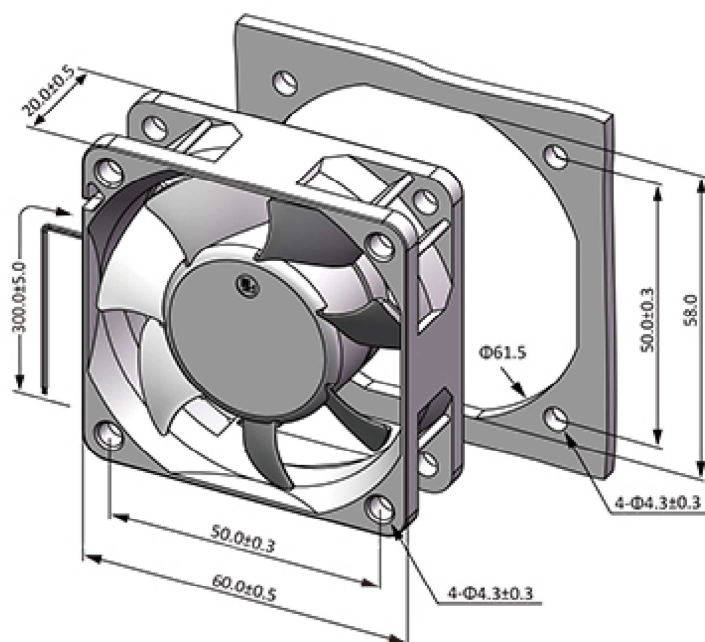

PQ Curve (At Rated Voltage)

