

**7020**

**70x70x20MM**

### General Specifications

- ◆ Material..... Frame: Plastic (UL94V-0)  
Impeller: Plastic (UL94V-0)  
Lead Wire: UL1007AWG#24 or Equivalent (+) Red, (-) Black
- ◆ Expected Life..... Ball Bearing 70,000hrs (40°C)  
Sleeve Bearing 30,000hrs (40°C)
- ◆ Temperature Range.... Operating Temperature -10°C~70°C (Non-condensing)  
Storage Temperature -40°C~70°C (Non-condensing)
- ◆ Safety Standards..... UL, TUV, RoHS, CE
- ◆ DC Fan Specials..... RD, FG, PWM, IP56, IP68




### Specifications

| Model       | Rev | #Bearing<br>Type | Rated<br>Voltage | Operating<br>Voltage | Input<br>Current | Input<br>Power | Speed | Max Air Flow |        | Max<br>Static Pressure |       | Noise | Weight |
|-------------|-----|------------------|------------------|----------------------|------------------|----------------|-------|--------------|--------|------------------------|-------|-------|--------|
| Part No.    | A   | B                | VDC              | VDC                  | Amp              | Watt           | RPM   | CFM          | m³/min | Inch-H <sub>2</sub> O  | Pa    | dB-A  | g      |
| DA07020#24U | F01 | B.S              | 24               | 14.0~27.6            | 0.30             | 7.20           | 5500  | 50.28        | 1.98   | 0.36                   | 90.78 | 45.9  | 54.0   |
| DA07020#24H | F01 | B.S              | 24               | 14.0~27.6            | 0.25             | 6.00           | 5000  | 47.22        | 1.86   | 0.29                   | 71.39 | 42.9  | 54.0   |
| DA07020#24M | F01 | B.S              | 24               | 14.0~27.6            | 0.20             | 4.80           | 4500  | 40.58        | 1.60   | 0.25                   | 61.60 | 40.2  | 54.0   |
| DA07020#24L | F01 | B.S              | 24               | 14.0~27.6            | 0.15             | 3.60           | 4000  | 36.14        | 1.42   | 0.19                   | 48.56 | 36.9  | 54.0   |

All models could be customized on voltage or any other requirements to fit your need.

### Dimensions (Unit:mm)

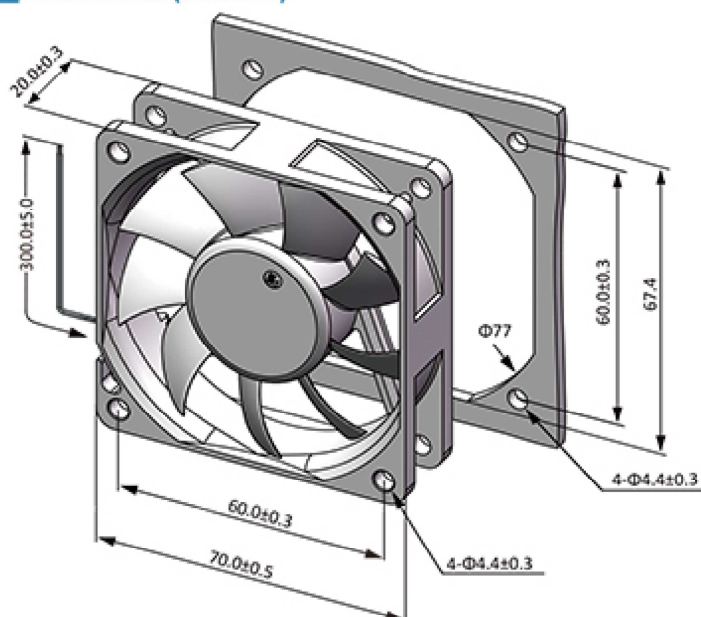

### PQ Curve (At Rated Voltage)

