

7015

70x70x15MM

General Specifications

- ◆ Material..... Frame: Plastic (UL94V-0)
Impeller: Plastic (UL94V-0)
Lead Wire: UL1007AWG#24 or Equivalent (+) Red, (-) Black
- ◆ Expected Life..... Ball Bearing 70,000hrs (40°C)
Sleeve Bearing 30,000hrs (40°C)
- ◆ Temperature Range.... Operating Temperature -10°C~70°C (Non-condensing)
Storage Temperature -40°C~70°C (Non-condensing)
- ◆ Safety Standards..... UL, TUV, RoHS, CE
- ◆ DC Fan Specials..... RD, FG, IP56




Specifications

Model	Rev	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	A	B	VDC	VDC	Amp	Watt	RPM	CFM	m³/min	Inch-H₂O	Pa	dB-A	g
DA07015#12U	F01	B.S	12	7.0~13.8	0.45	5.40	4500	36.47	1.03	0.23	59.94	35.5	48.0
DA07015#12H	F01	B.S	12	7.0~13.8	0.40	4.80	4000	32.21	0.91	0.18	45.21	30.5	48.0
DA07015#12M	F01	B.S	12	7.0~13.8	0.30	3.60	3500	27.53	0.78	0.14	33.63	24.5	48.0
DA07015#12L	F01	B.S	12	7.0~13.8	0.20	2.40	3000	24.13	0.68	0.10	26.08	20.7	48.0
DA07015#24H	F01	B.S	24	14.0~27.6	0.25	6.00	4000	32.21	0.91	0.18	45.21	30.5	48.0
DA07015#24M	F01	B.S	24	14.0~27.6	0.20	4.80	3500	27.53	0.78	0.14	33.63	24.5	48.0
DA07015#24L	F01	B.S	24	14.0~27.6	0.15	3.60	3000	24.13	0.68	0.10	26.08	20.7	48.0

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

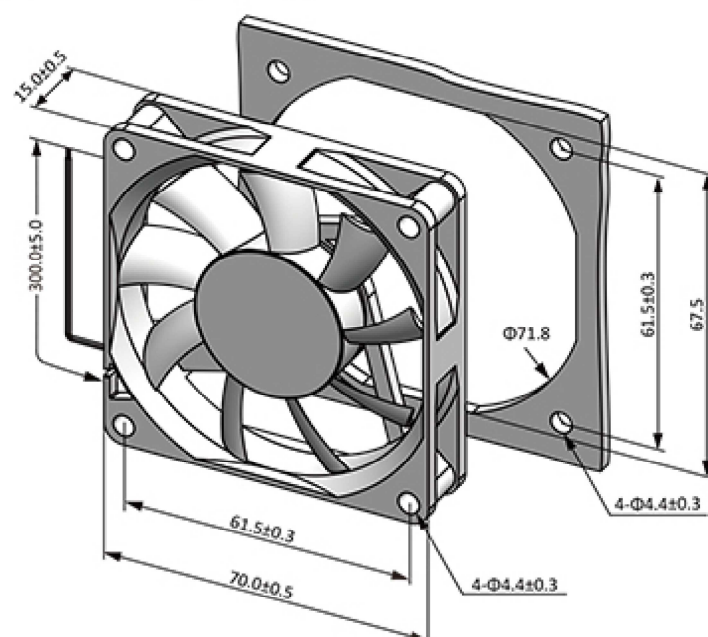

PQ Curve (At Rated Voltage)

