

20060 200x200x60MM

General Specifications

- Material..... Frame: Aluminum Alloy, Painted black
Impeller: Plastic (UL94V-0)
Lead Wire :UL1007AWG#22 or Equivalent (+) Red, (-) Black
- Expected Life..... Ball Bearing 50,000hrs (40°C)
- Temperature Range.... Operating Temperature -10°C~70°C (Non-condensing)
Storage Temperature -40°C~70°C (Non-condensing)
- Safety Standards..... UL, TUV, RoHS, CE
- DC Fan Specials..... RD, FG, PWM, Temperature Control, IP56




Specifications

Model	Rev	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	A	B	VDC	VDC	Amp	Watt	RPM	CFM	m³/min	Inch-H ₂ O	Pa	dB-A	g
DA20060#24H	F01	B	24	14.0~27.6	2.50	60.00	3000	559.45	15.85	0.82	203.78	65.4	1031.0
DA20060#24M	F01	B	24	14.0~27.6	1.50	36.00	2500	468.08	13.26	0.56	140.58	60.3	1031.0
DA20060#24L	F01	B	24	14.0~27.6	1.00	24.00	2000	373.23	10.57	0.35	88.25	53.4	1031.0
DA20060#48H	F01	B	48	28.0~56.0	1.20	57.60	3000	559.45	15.85	0.82	203.78	65.4	1031.0
DA20060#48M	F01	B	48	28.0~56.0	0.80	38.40	2500	468.08	13.26	0.56	140.58	60.3	1031.0
DA20060#48L	F01	B	48	28.0~56.0	0.50	24.00	2000	373.23	10.57	0.35	88.25	53.4	1031.0

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

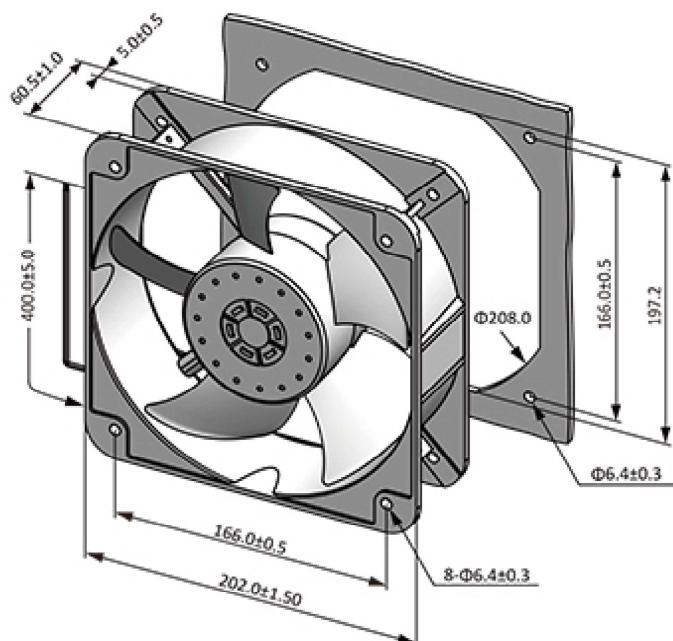

PQ Curve (At Rated Voltage)

