

25489

Φ254x89MM

General Specifications

- ◆ Material..... Frame: Aluminum Alloy, Painted black
Impeller: Plastic (UL94V-0)
Lead Wire: UL1007AWG#22 or Equivalent (+) Red, (-) Black
- ◆ Expected Life..... Ball Bearing 50,000hrs (40°C)
- ◆ Temperature Range.... Operating Temperature -10°C~70°C (Non-condensing)
Storage Temperature -40°C~70°C (Non-condensing)
- ◆ Safety Standards..... UL, TUV, RoHS, CE
- ◆ DC Fan Specials..... RD, FG, PWM, Temperature Control, IP56




Specifications

Model	Rev	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	A	B	VDC	VDC	Amp	Watt	RPM	CFM	m³/min	Inch-H ₂ O	Pa	dB-A	g
DA25489#24H	F01	B	24	14.0~27.6	3.50	84.00	2600	833.82	23.62	0.88	218.04	69.2	2140.0
DA25489#24M	F01	B	24	14.0~27.6	2.20	52.80	2100	668.51	18.94	0.58	144.64	63.1	2140.0
DA25489#24L	F01	B	24	14.0~27.6	1.50	36.00	1600	520.70	14.75	0.36	89.52	56.1	2140.0
DA25489#48H	F01	B	48	28.0~56.0	2.00	96.00	2600	833.82	23.62	0.88	218.04	69.2	2140.0
DA25489#48M	F01	B	48	28.0~56.0	1.20	57.60	2100	668.51	18.94	0.58	144.64	63.1	2140.0
DA25489#48L	F01	B	48	28.0~56.0	0.80	38.40	1600	520.70	14.75	0.36	89.52	56.1	2140.0

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

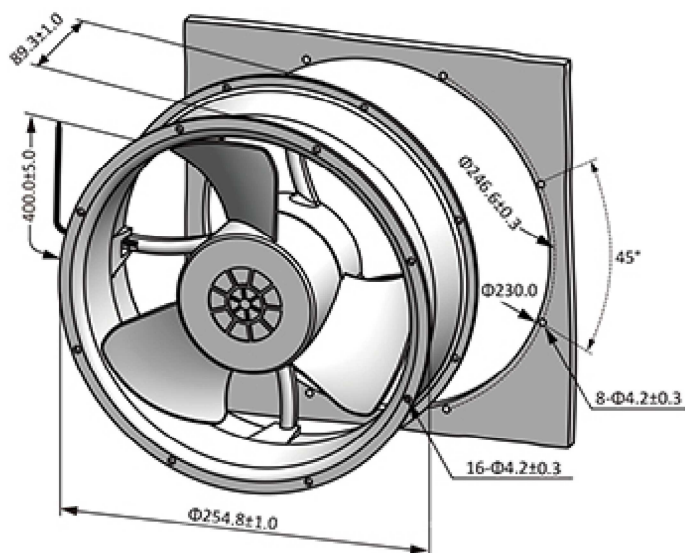

PQ Curve (At Rated Voltage)

