

9238

92x92x38MM

General Specifications

- ◆ Material..... Frame: Plastic (UL94V-0)
Impeller: Plastic (UL94V-0)
Lead Wire: UL1007AWG#24 or Equivalent (+) Red, (-) Black
- ◆ Expected Life..... Ball Bearing 70,000hrs (40°C)
- ◆ Temperature Range.... Operating Temperature -10°C~70°C (Non-condensing)
Storage Temperature -40°C~70°C (Non-condensing)
- ◆ Safety Standards..... UL, TUV, RoHS, CE
- ◆ DC Fan Specials..... RD, FG, PWM, IP56




Specifications


Model	Rev	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	A	B	VDC	VDC	Amp	Watt	RPM	CFM	m³/min	Inch-H₂O	Pa	dB-A	g
DA09238#12U	F02	B	12	7.0~13.8	2.00	24.00	6000	133.86	3.79	1.00	248.91	61.3	245.0
DA09238#12H	F02	B	12	7.0~13.8	1.60	19.20	5000	110.42	3.13	0.69	172.67	56.8	245.0
DA09238#12M	F02	B	12	7.0~13.8	1.30	15.60	4000	84.63	2.40	0.40	99.36	51.5	245.0
DA09238#12L	F02	B	12	7.0~13.8	1.10	13.20	3000	63.47	1.80	0.22	55.89	45.3	245.0
DA09238#24U	F02	B	24	14.0~27.6	1.00	24.00	6000	133.86	3.79	1.00	248.91	61.3	245.0
DA09238#24H	F02	B	24	14.0~27.6	0.80	19.20	5000	110.42	3.13	0.69	172.67	56.8	245.0
DA09238#24M	F02	B	24	14.0~27.6	0.60	14.40	4000	84.63	2.40	0.40	99.36	51.5	245.0
DA09238#24L	F02	B	24	14.0~27.6	0.50	12.00	3000	63.47	1.80	0.22	55.89	45.3	245.0
DA09238#48U	F02	B	48	28.0~56.0	0.50	24.00	6000	133.86	3.79	1.00	248.91	61.3	245.0
DA09238#48H	F02	B	48	28.0~56.0	0.40	19.20	5000	110.42	3.13	0.69	172.67	56.8	245.0
DA09238#48M	F02	B	48	28.0~56.0	0.30	14.40	4000	84.63	2.40	0.40	99.36	51.5	245.0
DA09238#48L	F02	B	48	28.0~56.0	0.25	12.00	3000	63.47	1.80	0.22	55.89	45.3	245.0

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

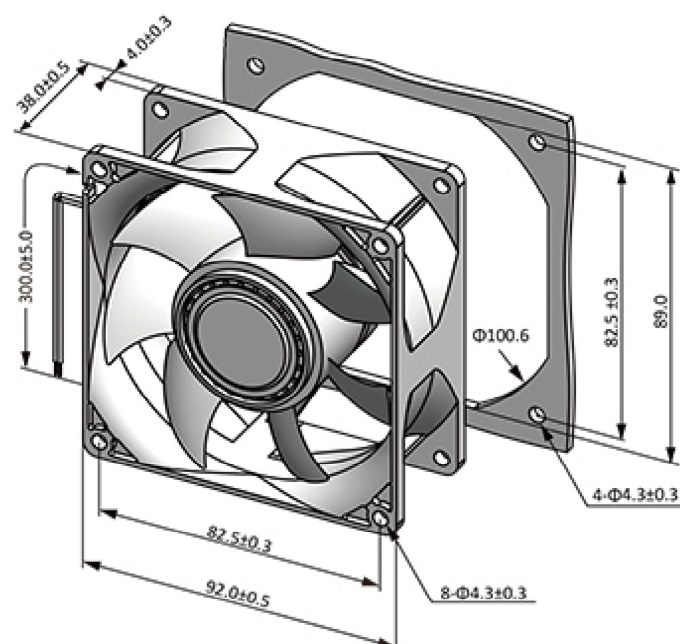

PQ Curve (At Rated Voltage)

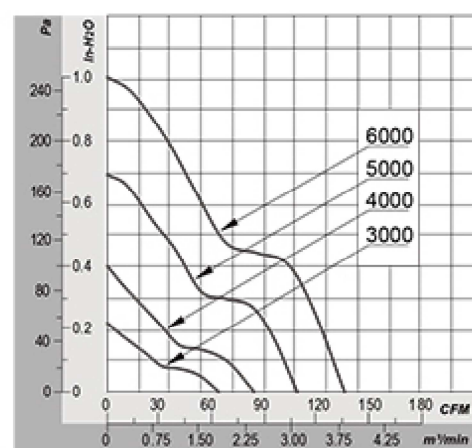

9238Z

92x92x38MM

General Specifications

- ◆ Material..... Frame: Plastic (UL94V-0)
Impeller: Plastic (UL94V-0)
Lead Wire: UL1007AWG#24 or Equivalent (+) Red, (-) Black
- ◆ Expected Life..... Ball Bearing 70,000hrs (40°C)
- ◆ Temperature Range.... Operating Temperature -10°C~70°C (Non-condensing)
Storage Temperature -40°C~70°C (Non-condensing)
- ◆ Safety Standards..... UL, TUV, RoHS, CE
- ◆ DC Fan Specials..... RD, FG, PWM, Temperature Control, IP56




Specifications


Model	Rev	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	A	B	VDC	VDC	Amp	Watt	RPM	CFM	m³/min	Inch-H ₂ O	Pa	dB-A	g
DZ09238#12U	F01	B	12	7.0~13.8	2.50	30.00	6000	128.50	3.64	0.83	207.34	55.4	166.0
DZ09238#12H	F01	B	12	7.0~13.8	1.80	21.60	5500	116.82	3.31	0.69	171.35	52.6	166.0
DZ09238#12M	F01	B	12	7.0~13.8	1.20	14.40	5000	106.90	3.03	0.59	145.87	50.2	166.0
DZ09238#12L	F01	B	12	7.0~13.8	0.90	10.80	4500	95.50	2.71	0.50	123.65	47.4	166.0
DZ09238#24U	F01	B	24	14.0~27.6	1.50	36.00	6000	128.50	3.64	0.83	207.34	55.4	166.0
DZ09238#24H	F01	B	24	14.0~27.6	1.00	24.00	5500	116.82	3.31	0.69	171.35	52.6	166.0
DZ09238#24M	F01	B	24	14.0~27.6	0.80	19.20	5000	106.90	3.03	0.59	145.87	50.2	166.0
DZ09238#24L	F01	B	24	14.0~27.6	0.60	14.40	4500	95.50	2.71	0.50	123.65	47.4	166.0
DZ09238#48H	F01	B	48	28.0~56.0	0.60	28.80	5500	116.82	3.31	0.69	171.35	52.6	166.0
DZ09238#48M	F01	B	48	28.0~56.0	0.40	19.20	5000	106.90	3.03	0.59	145.87	50.2	166.0
DZ09238#48L	F01	B	48	28.0~56.0	0.30	14.40	4500	95.50	2.71	0.50	123.65	47.4	166.0

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

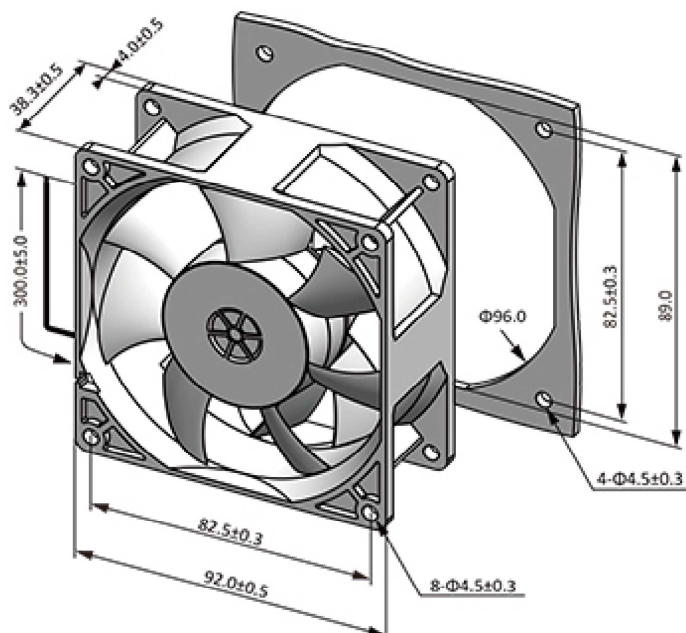

PQ Curve (At Rated Voltage)

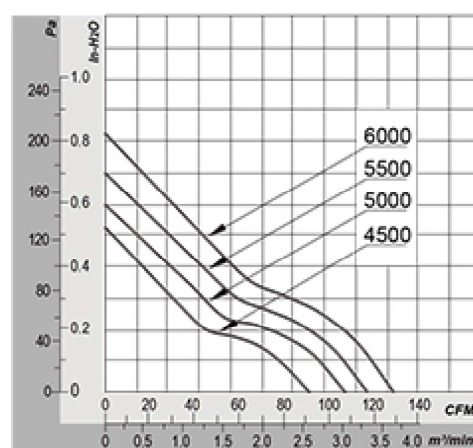

9238Z

92x92x38MM

General Specifications

- ◆ Material..... Frame: Plastic (UL94V-0)
Impeller: Plastic (UL94V-0)
Lead Wire: UL1007AWG#24 or Equivalent (+) Red, (-) Black
- ◆ Expected Life..... Ball Bearing 70,000hrs (40°C)
- ◆ Temperature Range.... Operating Temperature -10°C~70°C (Non-condensing)
Storage Temperature -40°C~70°C (Non-condensing)
- ◆ Safety Standards..... UL, TUV, RoHS, CE
- ◆ DC Fan Specials..... RD, FG, PWM, Temperature Control, IP56




Specifications


Model	Rev	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	A	B	VDC	VDC	Amp	Watt	RPM	CFM	m³/min	Inch-H ₂ O	Pa	dB-A	g
DZ09238#12U	F03	B	12	7.0~13.8	2.50	30.00	6000	121.24	3.43	0.94	235.04	56.7	166.0
DZ09238#12H	F03	B	12	7.0~13.8	1.80	21.60	5500	110.84	3.14	0.80	198.61	53.5	166.0
DZ09238#12M	F03	B	12	7.0~13.8	1.20	14.40	5000	99.56	2.82	0.66	164.06	50.2	166.0
DZ09238#12L	F03	B	12	7.0~13.8	0.90	10.80	4500	89.85	2.55	0.54	133.35	47.8	166.0
DZ09238#24U	F03	B	24	14.0~27.6	1.50	36.00	6000	121.24	3.43	0.94	235.04	56.7	166.0
DZ09238#24H	F03	B	24	14.0~27.6	1.00	24.00	5500	110.84	3.14	0.80	198.61	53.5	166.0
DZ09238#24M	F03	B	24	14.0~27.6	0.80	19.20	5000	99.56	2.82	0.66	164.06	50.2	166.0
DZ09238#24L	F03	B	24	14.0~27.6	0.60	14.40	4500	89.85	2.55	0.54	133.35	47.8	166.0
DZ09238#48H	F03	B	48	28.0~56.0	0.60	28.80	5500	110.84	3.14	0.80	198.61	53.5	166.0
DZ09238#48M	F03	B	48	28.0~56.0	0.40	19.20	5000	99.56	2.82	0.66	164.06	50.2	166.0
DZ09238#48L	F03	B	48	28.0~56.0	0.30	14.40	4500	89.85	2.55	0.54	133.35	47.8	166.0

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

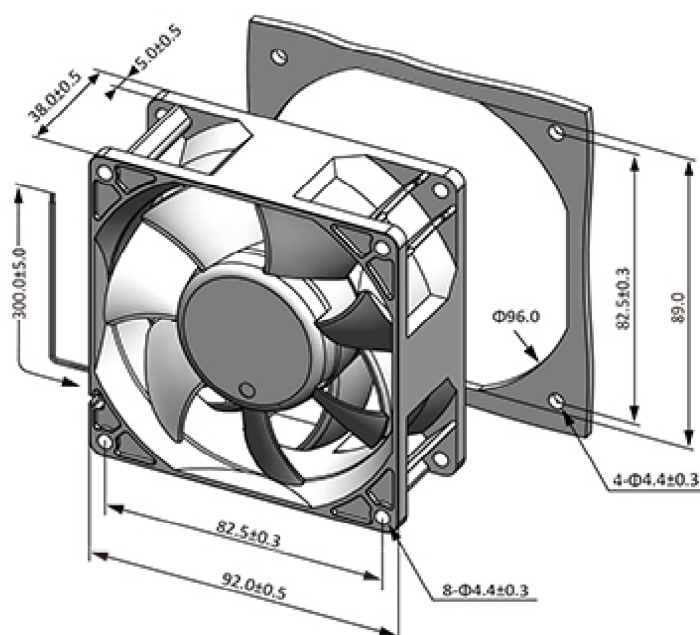

PQ Curve (At Rated Voltage)

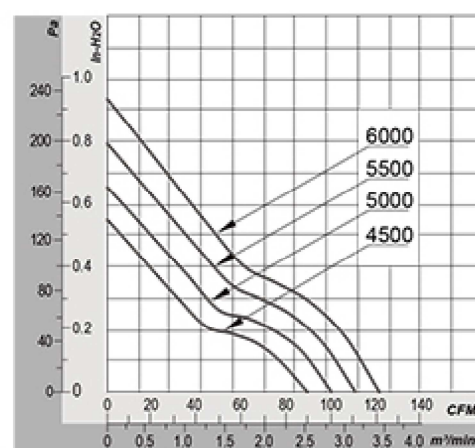

9238Z

92x92x38MM

General Specifications

- ◆ Material..... Frame: Plastic (UL94V-0)
Impeller: Plastic (UL94V-0)
Lead Wire: UL1007AWG#24 or Equivalent (+) Red, (-) Black
- ◆ Expected Life..... Ball Bearing 70,000hrs (40°C)
- ◆ Temperature Range.... Operating Temperature -10°C~70°C (Non-condensing)
Storage Temperature -40°C~70°C (Non-condensing)
- ◆ Safety Standards..... RoHS, CE
- ◆ DC Fan Specials..... RD, FG, PWM, Temperature Control, IP68




Specifications

Model	Rev	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	A	B	VDC	VDC	Amp	Watt	RPM	CFM	m³/min	Inch-H₂O	Pa	dB-A	g
DZ09238#24U	F04	B	24	14.0~27.6	0.92	22.08	9500	144.37	4.09	2.03	505.24	62.6	166.0

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

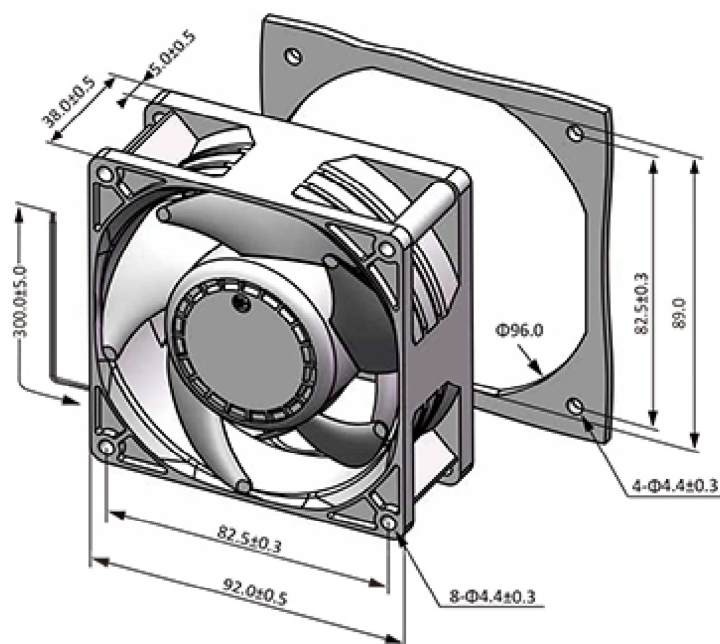

PQ Curve (At Rated Voltage)

