

12032 120x120x32MM

General Specifications

- Material..... Frame: Plastic (UL94V-0)
Impeller: Plastic (UL94V-0)
Lead Wire: UL1007AWG#24 or Equivalent (+) Red, (-) Black
- Expected Life..... Ball Bearing 70,000hrs (40°C)
- Temperature Range.... Operating Temperature -10°C~70°C (Non-condensing)
Storage Temperature -40°C~70°C (Non-condensing)
- Safety Standards..... UL, TUV, RoHS, CE
- DC Fan Specials..... RD, FG, PWM, IP56




Specifications

Model	Rev	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	A	B	VDC	VDC	Amp	Watt	RPM	CFM	m³/min	Inch-H ₂ O	Pa	dB-A	g
DA12032B12U	F02	B	12	7.0~13.8	2.00	24.00	3500	106.44	3.02	0.37	91.30	47.9	237.0
DA12032B12H	F02	B	12	7.0~13.8	1.00	12.00	3000	91.85	2.60	0.29	71.76	43.8	237.0
DA12032B12M	F02	B	12	7.0~13.8	0.80	9.60	2500	78.20	2.22	0.22	55.03	38.5	237.0
DA12032B12L	F02	B	12	7.0~13.8	0.50	6.00	2000	61.26	1.74	0.14	35.40	33.0	237.0
DA12032B24U	F02	B	24	14.0~27.6	1.00	24.00	3500	106.44	3.02	0.37	91.30	47.9	237.0
DA12032B24H	F02	B	24	14.0~27.6	0.70	16.80	3000	91.85	2.60	0.29	71.76	43.8	237.0
DA12032B24M	F02	B	24	14.0~27.6	0.50	12.00	2500	78.20	2.22	0.22	55.03	38.5	237.0
DA12032B24L	F02	B	24	14.0~27.6	0.30	7.20	2000	61.26	1.74	0.14	35.40	33.0	237.0
DA12032B48U	F02	B	48	28.0~56.0	0.60	28.80	3500	106.44	3.02	0.37	91.30	47.9	237.0
DA12032B48H	F02	B	48	28.0~56.0	0.45	21.60	3000	91.85	2.60	0.29	71.76	43.8	237.0
DA12032B48M	F02	B	48	28.0~56.0	0.25	12.00	2500	78.20	2.22	0.22	55.03	38.5	237.0
DA12032B48L	F02	B	48	28.0~56.0	0.15	7.20	2000	61.26	1.74	0.14	35.40	33.0	237.0

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

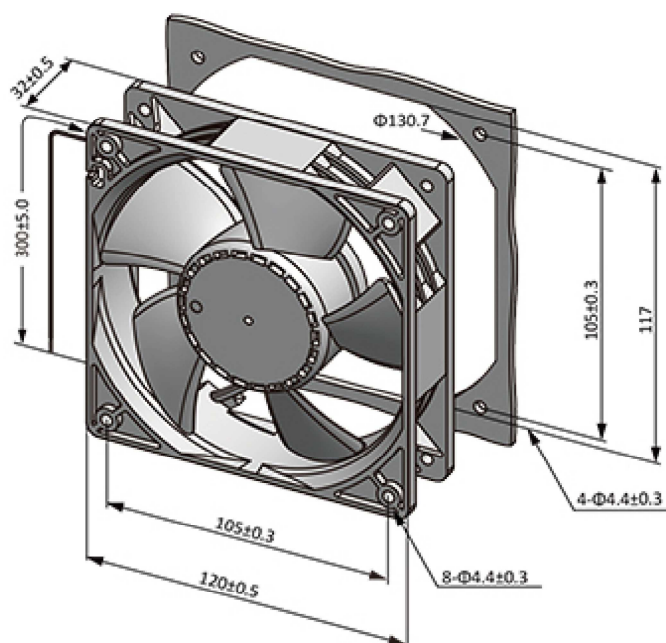

PQ Curve (At Rated Voltage)

