

6018

61x62x18MM

General Specifications

- ◆ Material..... Frame: Plastic (UL94V-0)
Impeller: Plastic (UL94V-0)
Lead Wire: UL1007AWG#24 or Equivalent (+) Red, (-) Black
- ◆ Expected Life..... Ball Bearing 70,000hrs (40°C)
Sleeve Bearing 30,000hrs (40°C)
- ◆ Temperature Range.... Operating Temperature -10°C~70°C (Non-condensing)
Storage Temperature -40°C~70°C (Non-condensing)
- ◆ Safety Standards..... UL, TUV, RoHS, CE
- ◆ DC Fan Specials..... RD, FG, PWM, IP56




Specifications

Model	Rev	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	A	B	VDC	VDC	Amp	Watt	RPM	CFM	m³/min	Inch-H₂O	Pa	dB-A	g
DB06018#12H	F01	B.S	12	7.0~13.8	0.30	3.60	5500	6.73	0.19	0.79	196.48	48.0	41.0
DB06018#12M	F01	B.S	12	7.0~13.8	0.20	2.40	4500	5.60	0.16	0.48	120.74	43.6	41.0
DB06018#12L	F01	B.S	12	7.0~13.8	0.15	1.80	3500	4.19	0.12	0.25	61.47	36.1	41.0
DB06018#24H	F01	B.S	24	14.0~27.6	0.20	4.80	5500	6.73	0.19	0.79	196.48	48.0	41.0
DB06018#24M	F01	B.S	24	14.0~27.6	0.12	2.88	4500	5.60	0.16	0.48	120.74	43.6	41.0
DB06018#24L	F01	B.S	24	14.0~27.6	0.08	1.92	3500	4.19	0.12	0.25	61.47	36.1	41.0

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

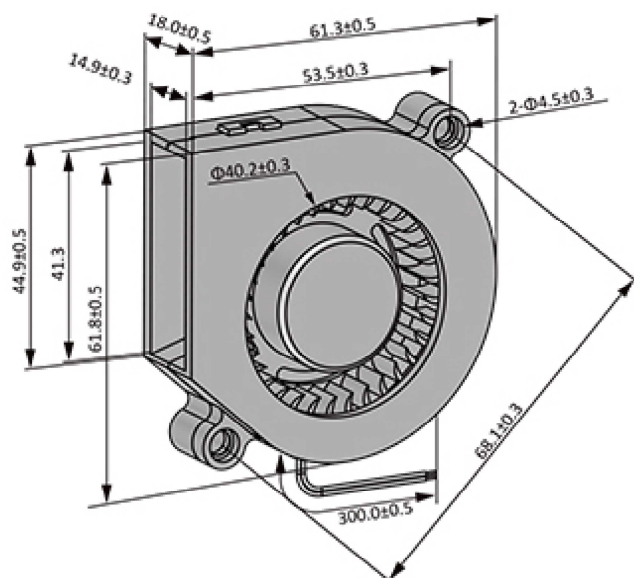

PQ Curve (At Rated Voltage)

