

22599

Φ225x99MM

General Specifications

- Material..... Pillow: Die-Cast Aluminum
Impeller: Plastic (UL94V-0)
Lead Wire: UL1007AWG#20 or Equivalent (+) Red, (-) Black
- Expected Life..... Ball Bearing 50,000hrs (40°C)
- Temperature Range.... Operating Temperature -10°C~70°C (Non-condensing)
Storage Temperature -40°C~70°C (Non-condensing)
- Safety Standards..... UL, TUV, RoHS, CE
- DC Fan Specials..... RD, FG, PWM, Temperature Control, IP56





Specifications

Model	Rev	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	A	B	VDC	VDC	Amp	Watt	RPM	CFM	m³/min	Inch-H ₂ O	Pa	dB-A	g
DB22599 B24H	F01	B	24	14.0~27.6	2.20	52.80	2400	610.10	17.28	2.43	606.92	63.0	1300
DB22599 B48H	F01	B	48	28.0~56.0	1.10	52.80	2400	610.10	17.28	2.43	606.92	63.0	1300

All models could be customized on voltage or any other requirements to fit your need.

Dimensions (Unit:mm)

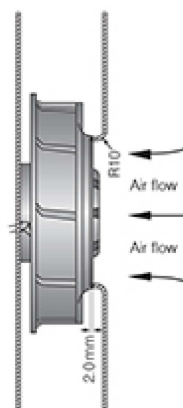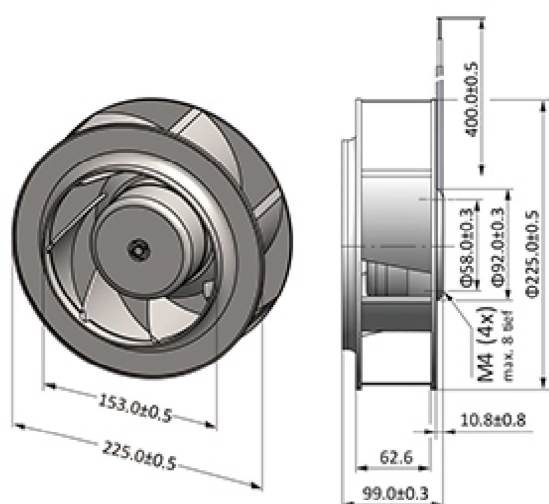

PQ Curve (At Rated Voltage)

